


H685/H820 IPSec Single Mode test

Typical Simple Diagram

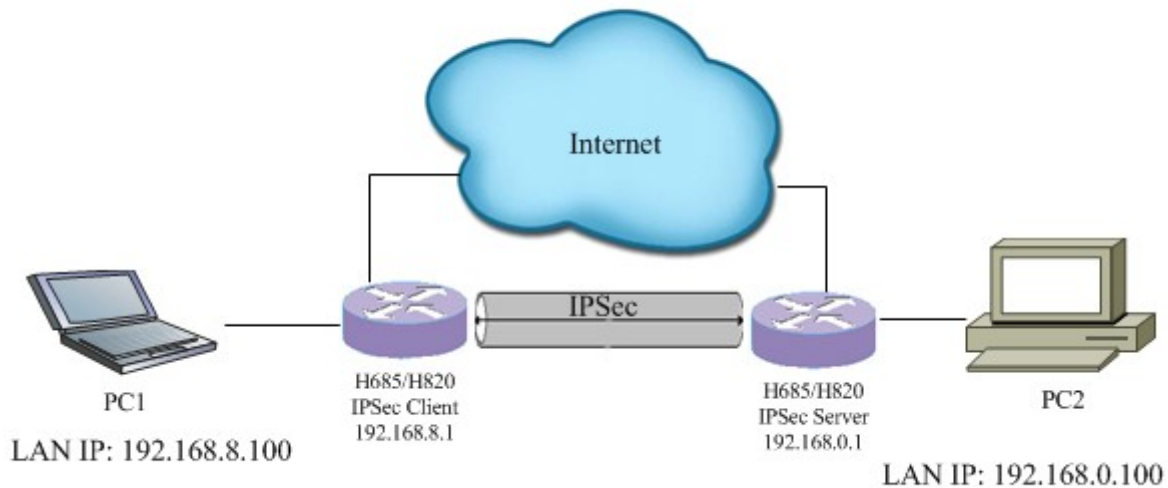

Notes: H685/H820 is from E-Lins.

Step 1) Confirm Server Router can be online if it uses WAN CELL Network.

Step 2) Configure IPSec Server on Server Router.

IPSEC VPN

IPSEC	
Name (ID/FQDN)	vpn1
Service Mode	Server
Local Network Type	Single
Local IP	192.168.0.1
Remote Network Type	Subnet
Remote IP	192.168.8.0 24
Auth method	Pre Shared Key
Password	●●●●●●
Interface	WAN
<input type="button" value="Advance"/>	

Step 3) Configure IPSec Client on Client Router.

IPSEC VPN

IPSEC	
Name (ID/FQDN)	vpn1
Service Mode	Client
Exchange Mode	Aggressive
Gateway	183.17.168.241
Local Network Type	Subnet
Local IP	192.168.8.0 24
Remote Network Type	Single
Remote IP	192.168.0.1
Auth method	Pre Shared Key
Password	●●●●●●
Interface	WAN
<input type="button" value="Advance"/>	

Step 4) try ping from client and server.

```
C:\Users\shenlan>ping 192.168.0.1  
正在 Ping 192.168.0.1 具有 32 字节的数据:  
来自 192.168.0.1 的回复: 字节=32 时间=158ms TTL=63  
来自 192.168.0.1 的回复: 字节=32 时间=122ms TTL=63  
来自 192.168.0.1 的回复: 字节=32 时间=141ms TTL=63  
来自 192.168.0.1 的回复: 字节=32 时间=128ms TTL=63
```