

H720wc Dual SIM WCDMA+CDMA2000 Router Datasheet



>>| Product Introduction

The H720wc Dual SIM WCDMA+CDMA2000 Router is from H720 series Cellular Router family, which is designed for establish a cellular wireless network and share a cellular broadband internet connection. The H720 series Cellular Router enables users to quickly create a secure Wi-Fi (802.11 b/g/n) network and provide access to the internet using a cellular network. By connect to cellular broadband network; an internet connection can be accessed and shared virtually anywhere within a wireless broadband network.

E-Lins' mobile data products are widely used in more than twenty industrial fields, such as power control, water schedule, traffic, oil field, weather forecast, environmental protection, street lamp control, post, bank and many other areas.

>>| Hot Spot for Dual SIM

H720 series is with two module two sim cards (two sim working online): two sim work together to backup (hot standby for failure backup, switch to backup line immediately if main line is failed);

Two radios are WCDMA+CDMA2000, one SIM supports WCDMA HSPA and back compatible to HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM, the other SIM supports CDMA2000 EVDO and back compatible to CDMA1x.

CDMA2000 has 800/1900Mhz and 450Mhz. Has EVDO Rev O, EVDO Rev A and EVDO Rev B. please confirm before order.

Main:

Built-in two industrial cellular modules (two modules to get different network supported), insert SIM/UIM card to work directly;

Built-in two sim card slot;

RJ45 LAN *4;

RJ45 WAN *1;


Option feature:

1. WiFi
2. GPS

3. Serial to cellular gateway (RS232 or RS485 port)
4. Internal battery

Redundancy backup: cellular1+ cellular 2+ WAN RJ45

>>| Typical Topology

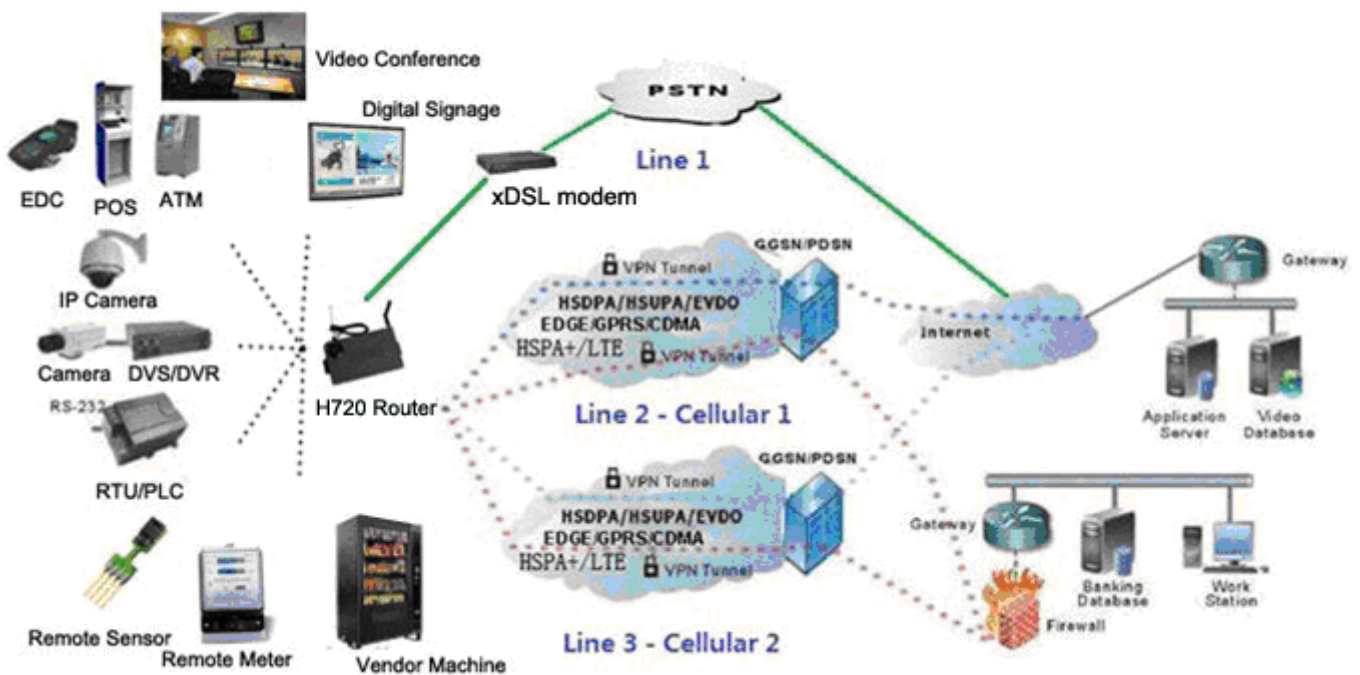

>>| Industrial Application

- Remote Data Monitor and Control
- CCTV, security surveillance
- Water, gas and oil flow metering and schedule
- AMR (automatic meter reading)
- Power station monitoring and control
- Remote POS (point of sale) terminals, ATM
- Traffic signals monitor and control, Traffic info guidance
- Oil field, weather forecast, environmental protection, street lamp monitoring and control
- Early Warning of Mountain Torrent
- Fleet management
- Power distribution network supervision
- Central heating system supervision

E-Lins Technology Co., Limited

Add: #901-902, Unit B, Jiayun Bld., Huada Rd., Dalang, Longhua, Shenzhen, 518000, China
Tel: +86-755-29230581 E-mail: sales@szelins.com www.szelins.com www.e-lins.com

- Weather station data transmission
- Hydrologic data acquisition
- Vending machine
- Telemetry, SCADA
- Vehicle logistics and diagnostics controlling
- Parking meter and Taxi Monitor
- Telecom equipment supervision (Mobile base station, microwave or optical relay station)

>>| Specification

Wireless	
Compatible Mobile Networks	Radio Module 1 supports UMTS WCDMA (HSUPA/HSDPA/HSPA) and GSM EDGE/GPRS; Radio Module 2 supports CDMA1x and CDMA2000 EVDO Rev 0, Rev A, Rev B
Cellular Frequency	UMTS/HSPA/HSUPA/HSPA (WCDMA/FDD): 850/1900/2100 MHz, option for 850/900/1900/2100Mhz/1700Mhz/AWS; Quad-band EGSM 850/900/1800/1900; CDMA1x/EVDO: 800/1900Mhz, option for 450Mhz; Notes: CDMA2000 has 800/1900Mhz and 450Mhz. Has EVDO Rev O, EVDO Rev A and EVDO Rev B. please confirm before order.
Bandwidth	HSUPA: Downlink 7.2Mbps, Uplink 5.76Mbps; HSDPA: Downlink 7.2 Mbps, Uplink 384k bps; WCDMA/UMTS: Downlink/Uplink 384 kbps; EDGE: Downlink 384 kbps, Uplink 118 kbps; GPRS: Downlink 108 kbps, Uplink 42.8 kbps; CDMA1x: Downlink/Uplink 153.6kbps; CDMA EVDO: Rev B: 14.7Mbps downlink, 5.4Mbps uplink Rev A: 3.1Mbps downlink, 2.4Mbps uplink Rev O: 2.4Mbps downlink, 153.6kbps uplink

	Notes: the bandwidth is peak value. Real value depends on carrier network support.
Bandwidth (bandwidth binding mode)	Twice bandwidth (depends on network quality)
Main Features and Performance	
USB Host	No, can ODM
SMS/Voice	SMS/Voice call to control router to be online, offline, reboot and status monitor; SMS is default feature, Voice is option
GPS (Option)	GPS feature
DTU (Option)	With DTU feature (Serial to Cellular Gateway feature, RS232 or RS485 port option). Details: Serial Baudrate: 300bps, 600bps, 1200bps, 2400bps, 4800bps, 9600bps, 19200bps, 38400bps, 57600bps, 115200bps; Serial Parity: none, even, odd; Serial Databits: 7, 8; Serial stopbits: 1, 2; Serial flow control: none, hardware, software; Mode: Server (up to 4 server centre, can OEM to be more), Client; Protocol: TCP, UDP ; Heart Beat : Yes;
VPN	PPTP, L2TP, IPSec, GRE, Tunnel (PPTP server, PPTP client, L2TP client, IPSec client, IPsec server)
OpenWRT (Option)	Optional
VRRP (Option)	Optional
Route	Static Route; Optional for Dynamic Route (BGP, BGPD, OSPF, Zebra, Rip);
SNMP	Support V1, V2. V3
VLAN	Support multi-LAN IP address, support two IP address
Wi-Fi	Optional, 802.11b/g/n; 300Mbps. Can be used as AP and client; Frequency from 2.4GHz to 2.483GHz, Access Points, Routers and Gateway Server Applications, wireless up to 254 PC users
Fail Over Redundancy	Auto-dial feature, keep alive link;

(network Backup feature)	LCP, ICMP check; Built-in watch dog; Dual cellular (2G/3G/4G), RJ45 WAN (xDSL, DHCP, Fixed IP), WiFi client four line redundancy; Cold Backup (WAN RJ45, Dual WAN Cellular, WiFi Client) is default, Hot Backup (Two Cellular) is default, Hot Backup (WAN RJ45 and WAN Cellular) is option; Cold Backup=Two lines not online at the same time. One line online and the other line standby, switch freely with triggers; Hot Backup=Two lines are online at the same time. Data goes the main line, and switch to the other line. Hot Backup switch time is shorter than Cold Backup.
POE	POE for LAN/WAN RJ45 (use with POE adapter)
Firmware update	support firmware update locally or remotely (LAN, WiFi and OTA WAN)
Syslog	local and remote
DDNS	Yes
DHCP Server	Yes
Internal Battery	Optional (8000mAH, 4000mAH *2)
Others	DNS proxy; Optimized EMC design; Real-time clock (NTP, support update with defined hours); WAN/LAN/Memory statistics; Local/remote profiles backup and retrieve;
Remote Management System	Option
Protocol	
Protocol support	TCP, UDP, SMTP, POP, ICMP, FTP, PPP, PPPoE, DHCP, DDNS, DNS, WPS, DMZ, NAT, xDSL, NTP, QoS, etc.
Security	
Firewall	support 64/128 bits WEP, 802.1x, WPA, and WPA2 support WDS

	support WPA1/2 – PSK support WPA1/2 – 802.1x support EAP – TLS, TTLS, LEAP, PEAP TKIP, AES encryption support access with user name & password. support access control base WAN/LAN interface support access control base source IP address defense DOS attack, support SYN flooding, IP surfing, ping of Death, fragile, teardrop, land etc. support PAP & CHAP support IP filtering support content filtering support NAT/NAPT/Port forwarding/DMZ
Advanced Firewall Features	Stateful Packet Inspection (SPI) VPN Pass-through
Media Access Control	CSMA/CA with ACK
Certifications	RADIUS Client
Interface	
LAN/WAN	4X 10/100M LAN port (RJ45 interface) 1X 10/100M WAN port (RJ45 interface) WAN ports support Cell/Static IP/DHCP/PPPoE (on demand, keep alive, schedule, manual)
Antenna	4-8 X antenna (50Ω SMA female interface, detachable): Wi-Fi*2 Cellular*2-4 GPS*1-2 Cellular support MIMO(Diversity Receiving) option; WiFi support MIMO (Diversity Receiving) option;
Led	SYS VPN WiFi Cell1 Cell2 Cell Signal1 Cell Signal2 LAN (10/100M) 1, 2, 3, 4 WAN CHR (Internal battery charging)

	GPS
Button	Reset
Console	1 console port (also can be used as M2M port)
Serial port	RS232 or RS485 with DB9 and Terminal Block interface
IO Port (option)	2
Management	Easy to use and management; Web/Telnet/SSH/CLI, support remote management SMS; SNMP; RMS (Remote Management System)
At command	Supported
UIM/SIM Card Slot	Support 1.8V/3V UIM/SIM cards, two sim card slot
DC Jack	Two types of input jack for DC 2.5mm DC jack * 1 Terminal Block * 1
Power	
Power supply	DC5V-50V , typical DC 12V1A-2A, 12v CAR USE; DC5V~40V is the default, DC5V~50V is the option
Current	Idle: about 170mA@12VDC Communication: about 320mA@12VDC
Software	
Device Management	WEB interface (Internet Explorer v6 or Later; Mozilla Firefox v1.5 or Later, or other Java-enabled Browsers, Chome, Opera, Safari, etc.)
Minimum System Requirements	Windows, Linux, Mac OS, IOS, Symbian, Android, other OS support web browser; Network Interface Card
Physical	
Operating Temperature	Storage Temperature: -40 ~ 85°C Working Temperature: -30 ~ 75°C
Humidity	95% Maximum (Non-condensing)

Dimensions	PCBA: 168mm x 111mm x 16mm With case: 180mm x 114mm x 32mm
Weight	705~725g (not including the antenna)
Color	Metal Gray-Black, OEM is available
Others	
Warranty	1 Year default. Option extends to 5 years maximum.
Package Contents	H720 Series wireless Router Ethernet Cable Power Adapter Antenna Others depends on option features

>>| H720 model and types

H720 xx - - - XXX (option)



W: WiFi WLAN

G: GPS

RS232/RS485: DTU feature (cellular to serial), RS232 or RS485 for choice

50V: DC input 5~50V support, default is 5~40V

B: internal rechargeable battery

t: 4G LTE version. Support FDD LTE or TDD LTE or FDD+TDD LTE, back compatible to 3G and 2G

w: 3G WCDMA HSPA version, support HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM

p: 3G WCDMA HSPA+ version, support HSPA+/HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM

eva: 3G CDMA2000 EVDO version, support EVDO RevA/EVDO Rev0/CDMA1x

evb: 3G CDMA2000 EVDO version, support EVDO RevB/EVDO RevA/EVDO Rev0/CDMA1x

td: 3G TD-SCDMA version, support TD-HSUPA/TD-HSDPA/TD-SCDMA/EDGE/GPRS/GSM

Notes:

- 1) H720 contains two radio module inside. Users can select the suitable type for each module
- 2) option feature can be select one or all
- 3) for LTE version, please confirm your LTE band and Network Carrier with order to avoid wrong selection

Notes:

1. We name HSDPA version and HSUPA version both as WCDMA version.

2. Please confirm the exact model and type before your order.

>>| Accessories

- The H720 Series wireless Router
- Ethernet Cable
- Power Adapter
- Antenna
- Others depends on the option features



Notes:

- 1) We packed the units with free accessories; default packed depends on stock and the device's feature requirement. If you need specify the type, please inform us when you order.
- 2) Different places have different band and frequency. Signal quality affects the data speed. The antenna in the packages is free default. It's a world-wide use type. Our free antenna may not get good signal or good speed in your area. Please get the dedicated antenna for your area yourself to get the best signal and data speed.
- 3) E-Lins has high gain antenna for option.